

FIG. 1

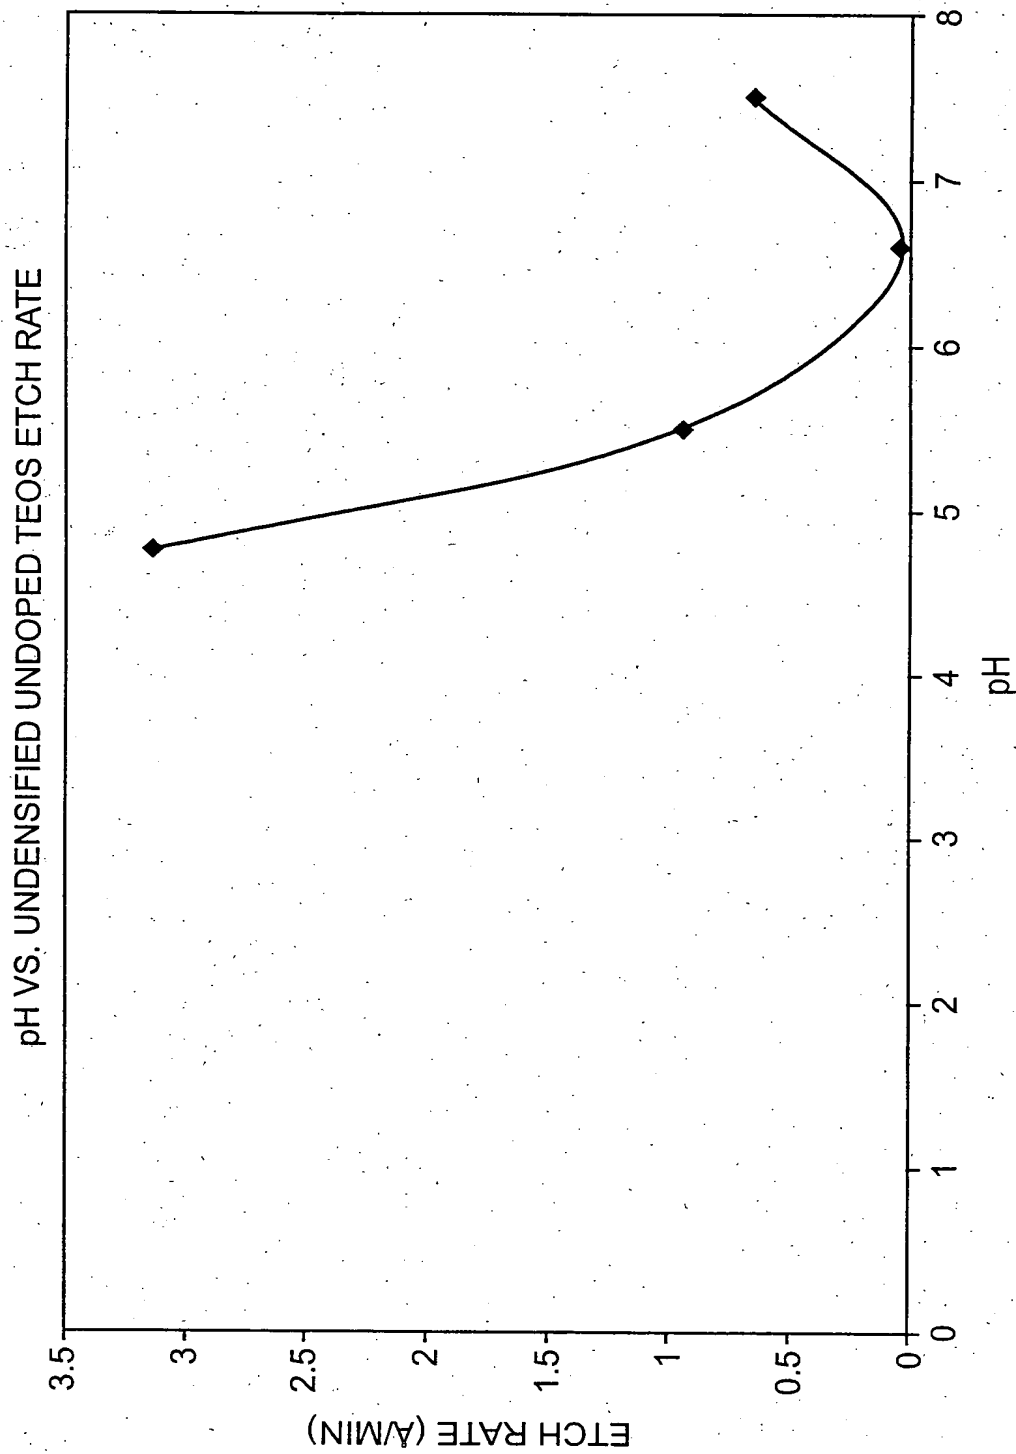


FIG. 2

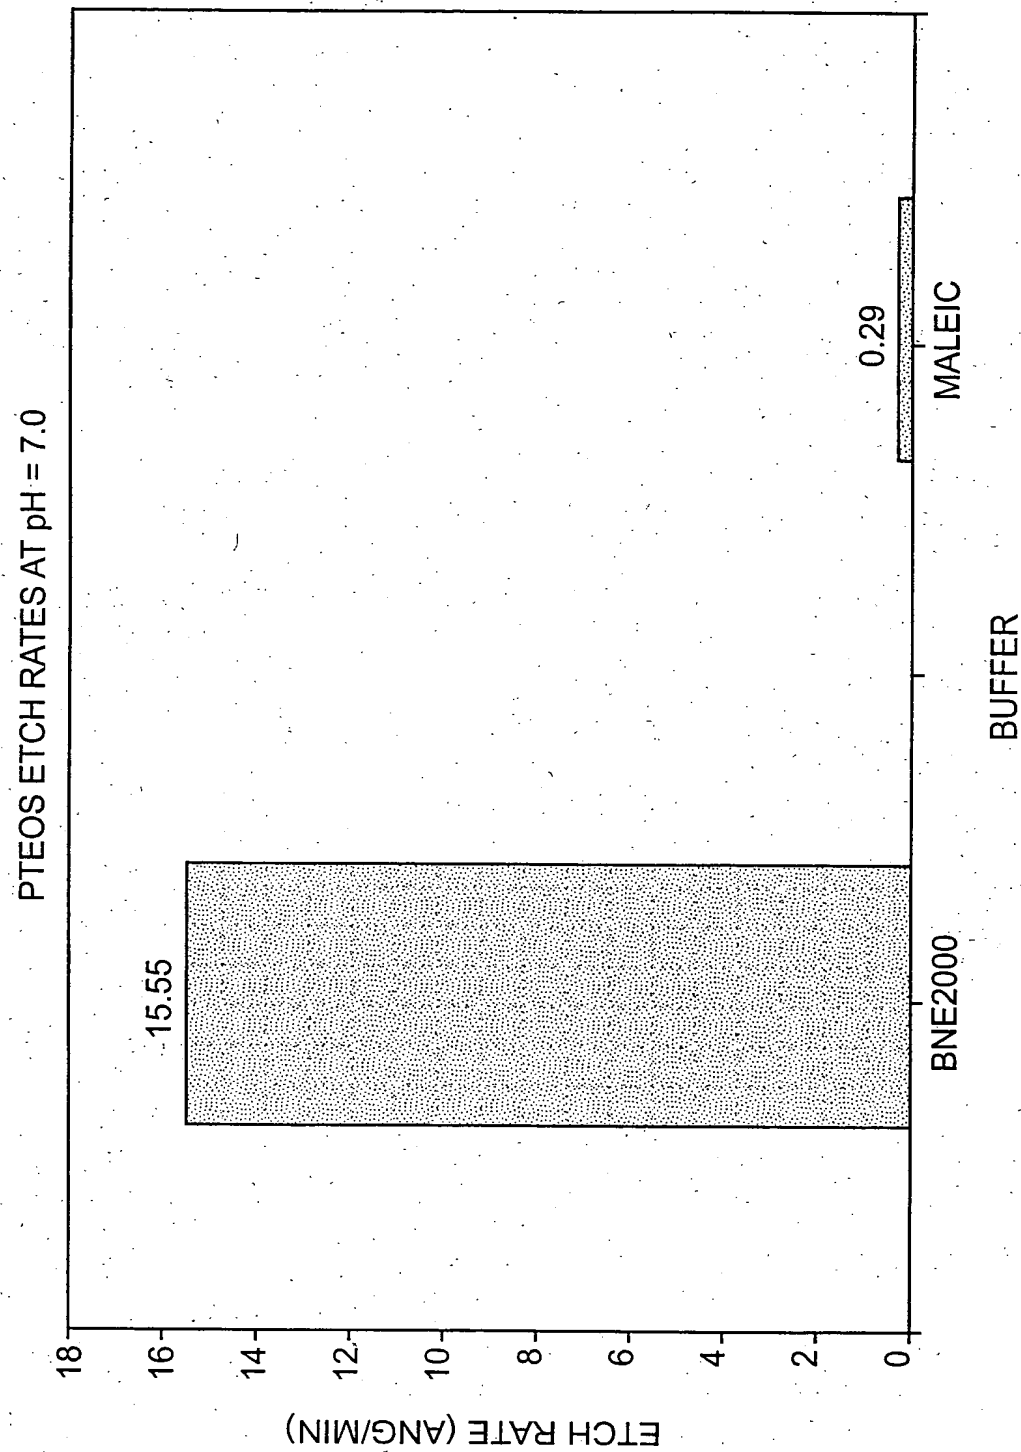


FIG. 3


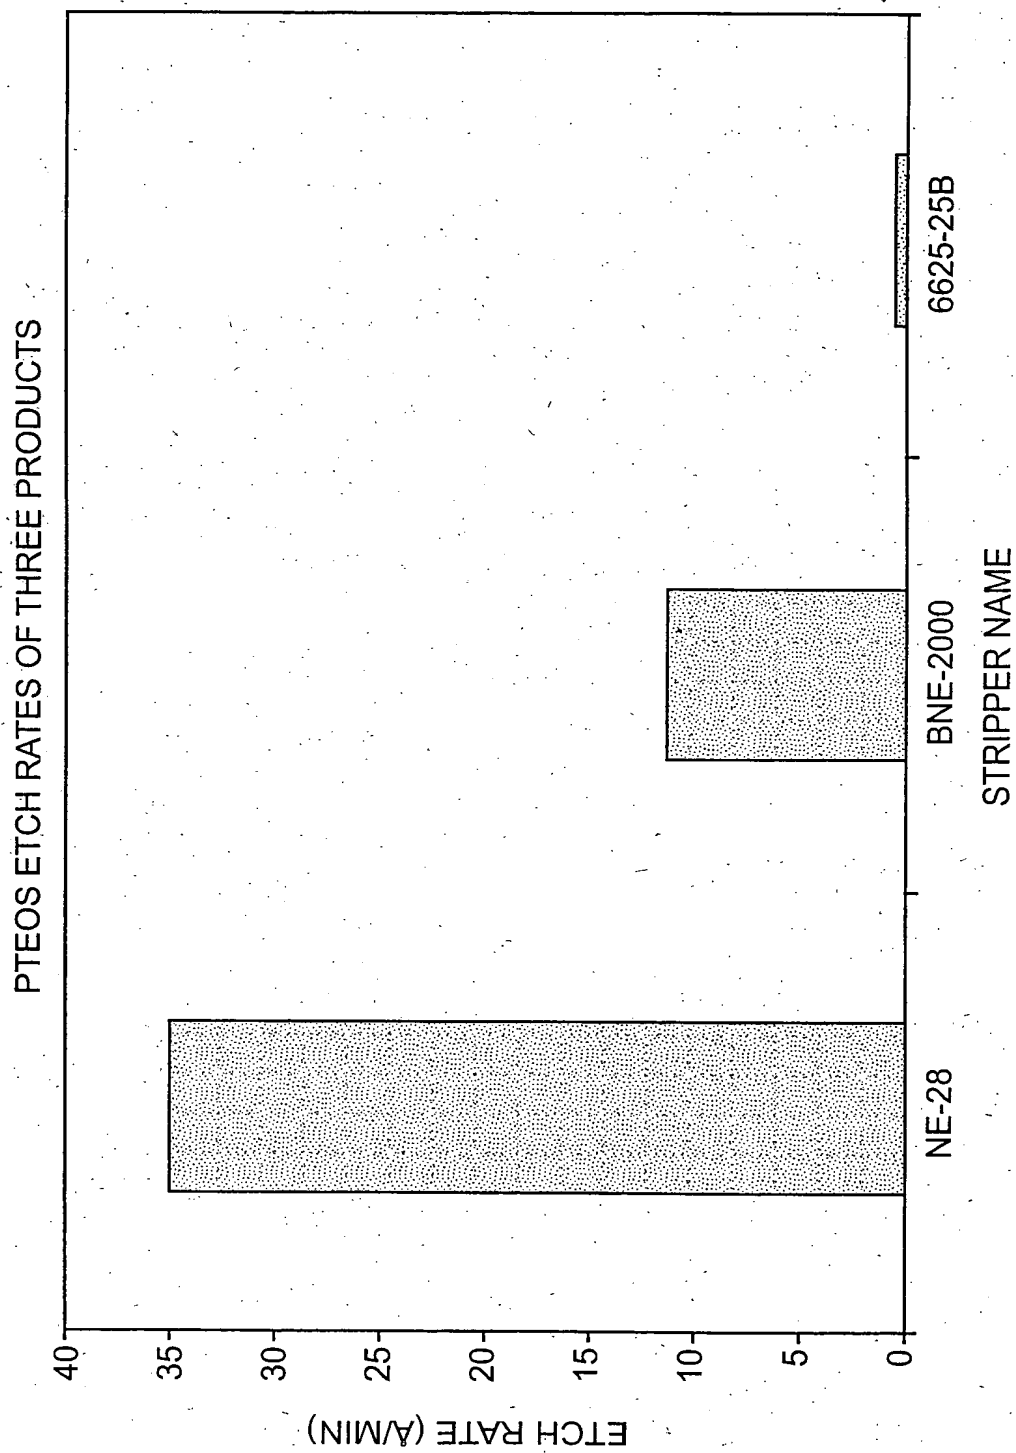


FIG. 4

BEFORE STRIP AND AFTER A RR6625-25B PROCESS

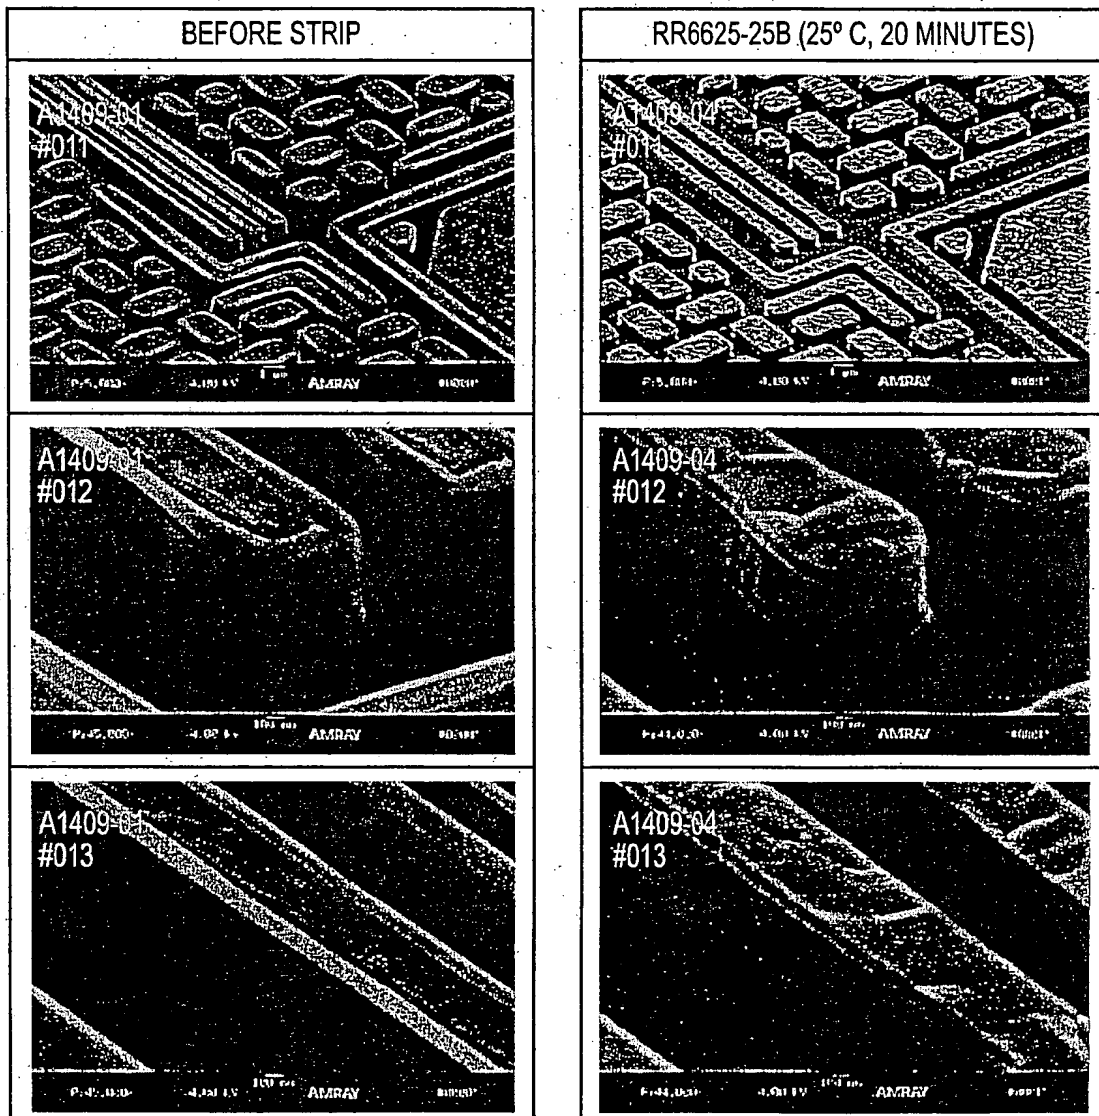


RR6625-25B (25°C, 20 MIN) → DI WATER (AMBIENT, 3 MIN) → N₂ BLOW DRY

FIG. 5

BEST AVAILABLE COPY

COMPARISON OF THREE FLOURIDE-CONTAINING STRIPPERS ON A VIA

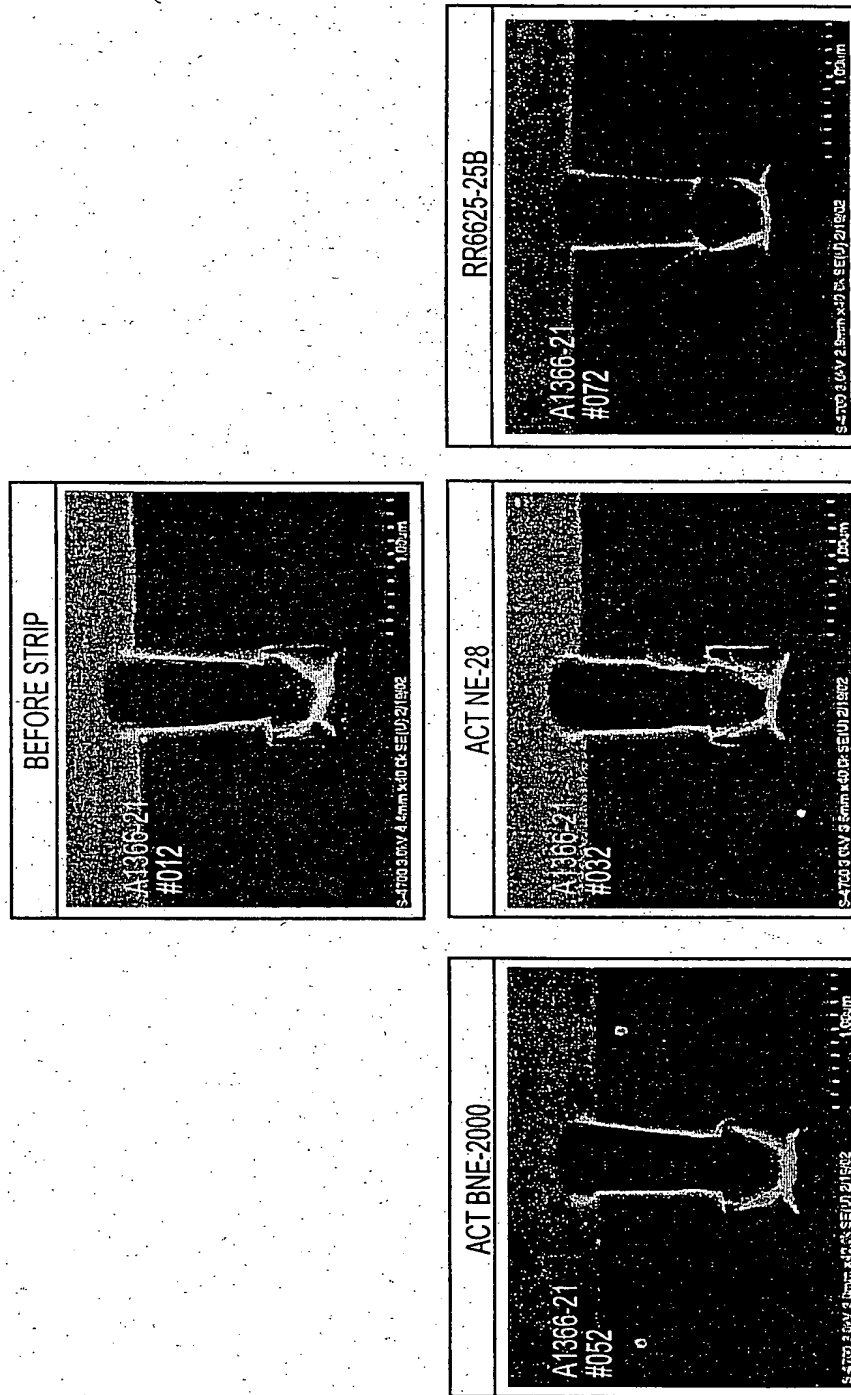

ACT STRIPPER (25°C, 20 MIN) → DI WATER (AMBIENT, 3 MIN) → N₂ BLOW DRY

FIG. 6